
LS7041C

裤后约克缝合压线一体机 York stitching and pressing machine for trousers back



应用范围 | Application


应用于牛仔 休闲裤后约克的拼接压线 Applied to jeans,casual pant's back York,stitching and pressing line

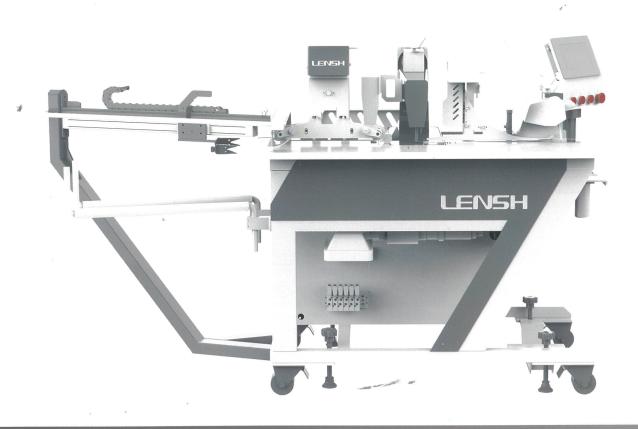





规格范围 | Specification range

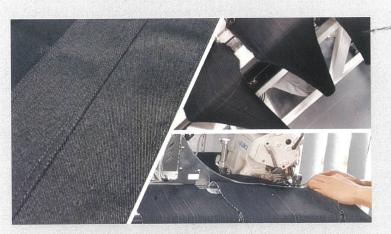

采用五线拷克 双链式压线

Use of five-line overlock and double chaintype pressing line





反面双链式 Reverse double-chain

应用工艺 | Application process

定制后拉式收料机构 Custom pull-up collection mechanism

积极主动式收料 Proactive collection





传统折叠收料,无法满足裤约克的裁片需求,同时后拉式克服了尺码大小不一的困扰 Traditional folding collection, can not meet the needs of the trouser York cutting, while overcome the trouble of different sizes

效率分析 | Efficiency analysis

90~110%









2道工序 2个人 效率低 2 processes 2 workers low efficiency

After



缝合压线一次完成 Stitching and pressing are completed at one time

之前 Before



取料1 Taking 1 缝合 Stitching 气动剪线1 Shear line 1 放料1 Feeding 1

> 气动剪线1 Shear line 1

工序搬运 Process handling 取料2 Taking 2 压线 Line pressing 气动剪线2

放料2 Feeding 2

之后 After



取料1 Taking 1 缝合 Stitching 压线 Line pressing 自动收料 Auto receiving



技术参数 | Technical parameters

| 型号 Model | 项目 | Project | 参数 Parameter |
|----------|----------------------------------|--------------|--|
| 7041C | 电压 | Voltage | 220V 50~60Hz |
| | 气压 | Air pressure | 0.5~0.6MPa |
| | 功率 | Power | 3KW |
| | 外形尺寸 | Dimensions | 2100*800*1700 |
| | 装箱尺寸 | Packing size | 1525*1225*1450mm |
| | 净重 | Net weight | 270kg |
| | 毛重 | Gross weight | 334kg |
| | 工作压力 | Air pressure | 0.45Mpa-0.75Mpa |
| | 效率 | Efficiency | 15S左右/片 |
| | 适应范围 To adapt to the scope of | | 各类需缝合压线的工序 All kinds of stitching and pressing processes 注:弧形过大的工序不适用衣片有拼接骨缝的不适用 Note: the process with too large arc is not Applicable to clothes with patchwork seam. |

^{*}以上型号仅供参考,详细情况请咨询。



The above types are only for reference, and you can consult local distributors for details.

^{*}为了改良,产品规格若有变更,恕不另行通知。为安全起见,使用之前,请仔细阅读使用手册。 Specifications are subject to change for improvement without further notice. Please carefully read the operating manual before use for safety.