


JYL-N2303-SA

BOTTOM
HEMMING MACHINE

辘脚机

Computerize automatic machine

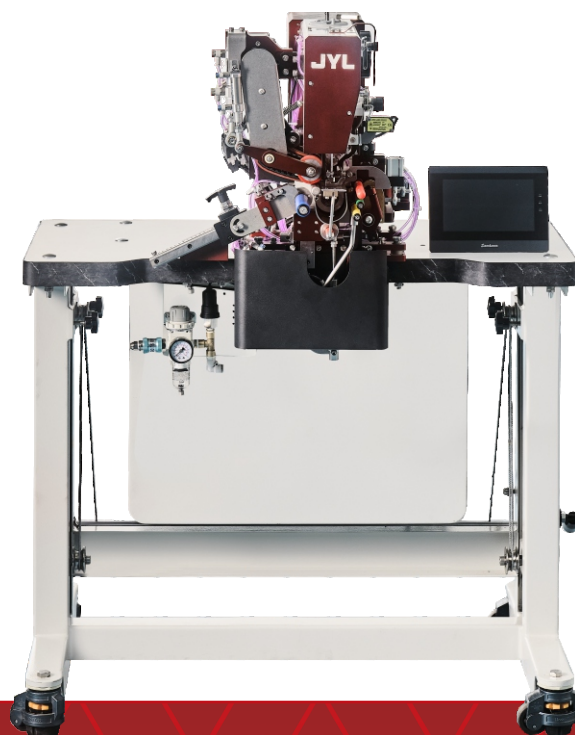

- ⊕ 上下拖轮与机针同步,送料,缝高低料时针距更精准,避免了接头密接针现像
- ⊕ 具有自动抬压脚、自动剪线、自动勾线、自动卷边筒,实现自动操作。

- ⊕ 创新型机架结构,可满足多样操作要求。
- ⊕ 采用2倍旋梭,减少更换底线频率。

1. The upper and lower tugs and needle feeding avoid the phenomenon of tight needle joints.
2. Equipped with automatic foot lifting, automatic thread cutting, automatic thread hooking, and automatic edge rolling cylinder, achieving automatic operation.
3. Innovative rack structure that can meet diverse operational requirements.
4. Use twice the rotating shuttle to reduce the frequency of replacing the bottom wire.



辘脚机 | JYL-N2303-SA

Bottom hemming machine

最快缝纫速度 Max sewing speed	2800rpm
工作电压 Operating Voltage	220V
工作气压 working air pressure	0.5Mpa
缝制针距长 Sewing needle spacing	0.8~12.8mm
机针型号 Type of needle	DPx5
缝绉范围 Sewing range	115/250mm
机器尺寸 Machine size	1020*670*1170mm