





TRADE MARK

**SEIKO**


# LHPW SERIES




**HIGH SPEED, EXTRA HIGH POST TYPE, COMPOUND FEED AND  
ALTERNATING PRESSERS, LOCKSTITCH MACHINES**

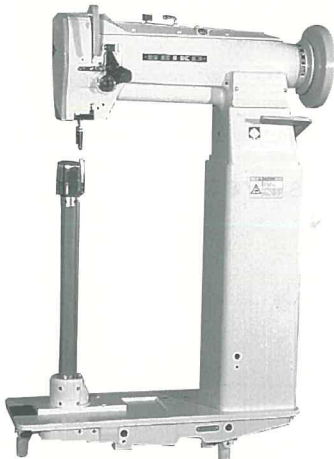


LHPW-8B-1-SF-LP  
- Variety -

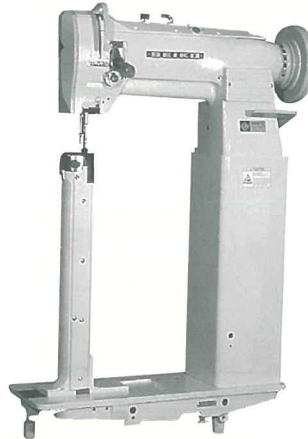

LHPW-8BL-1-LP

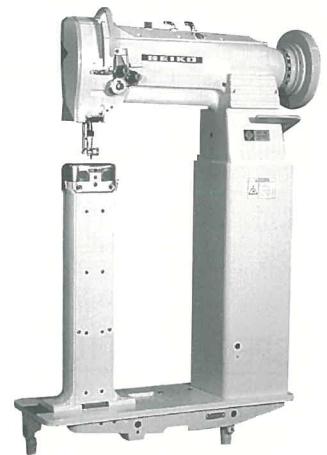


LHPW-28B




**LHPW-8B-1-SF-LP**

Single needle, slim post, standard vertical axis hook, reverse stitch, left post




**LHPW-8B-1-LP**

Single needle, standard vertical axis hook, reverse stitch, left post




**LHPW-8BL-1-LP**

Single needle, large vertical axis hook, reverse stitch, left post




**LHPW-28B**

Two needle, standard vertical axis hook, reverse stitch



**LHPW-28BL**

Two needle, large vertical axis hook, reverse stitch



## APPLICATIONS:

For sewing medium to heavy weight materials such as leather, vinyl, synthetics and laminated and coated materials

Suitable for sewing such products as bags, boots, travel cases, automobile upholstery, etc.

## ■ FEATURES

- Extra high post 17"(\*) bed and wide working space makes it easy for sewing of large materials
- Slim post width 1-3/16" for sewing round sharp corners and curves (-8B-1-SF-LP)
- Reduced the distance between the needle and the edge of throat plate (2.5mm) for sewing goods with narrow margin beautifully.  
Special throat plate (2.0mm) for narrower margin is also available at extra charge (-8B-1-SF-LP)
- Vertical axis hook
- Semi-automatic lubrication system
- Safety clutch prevents the hook from being damaged
- Reverse stitching
- Compound feed and alternating pressers mechanism assures even feeding of materials
- Right post type available (except -8B-SF-1-LP)

## ■ SPECIFICATIONS

Variety	Max. speed (s.p.m.)	Max. stitch length	Clearance under presser foot (by pedal) (by hand)		Needle bar stroke	Needle (standard)
-8B-1-SF-LP	2,000	7/32" (5.5mm)	5/8" (16mm)	21/64" (8.5mm)	1-25/64" (35.4mm)	DPx17 (#22) 135x17 (#140)
-8B-1-LP	2,200					
-8BL-1-LP						
-28B						
-28BL						
Variety	Amount of lift of alternating presser foot		Bed size		Working space	Post height
-8B-1-SF-LP	7/64"-7/32" (2.7 - 5.5mm)		20-25/64" x 7" (518 x 177mm)		10-5/32" x 21-25/32" (258 x 553 mm)	17-33/64" (445mm)
-8B-1-LP						17-7/16" (443mm)
-8BL-1-LP						17-33/64" (445mm)
-28B						17-7/16" (443mm)
-28BL						17-7/16" (443mm)

### NOTE

- (1) Speed depends on threads, materials and type of operation
- (2) Specifications subject to change without notice



**SEIKO**  
SEWING MACHINE CO., LTD.

<http://www.tctv.ne.jp/seik0001/>

SEIKO SEWING MACHINE CO., LTD.

11-3, Imado 1-chome, Taito-ku, Tokyo 111-8534, Japan

TEL: +81-3-3872-6173 (Overseas group)

FAX: +81-3-3873-6596

E-Mail: seik0001@tctv.ne.jp

URL: <http://www.tctv.ne.jp/seik0001/>