

CW series 系列

Single needle, High speed, Cylinder bed, Vertical axis hook,
Lockstitch machines

高速单针筒式综合送料机



CW-8B-2

Variety / 机型

CW-1

No Feed
无送料机构



CW-7B

Compound feed, reverse stitch
针送料, 倒缝装置




CW-8B-2

Compound feed and walking foot, reverse stitch
综合送料, 倒缝装置




CW-8BV

Compound feed and walking foot, reverse stitch,
synchronized binder
综合送料, 倒缝装置, 带包边器



CW-1

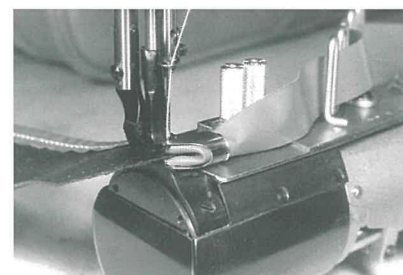

CW-8BV

Applications / 规格

- For darning and mending all types of medium to heavy weight materials. (CW-1)
适用于各种中厚料至厚料的弯曲、修理缝制 (CW-1)
- Designed for stitching tubular and curved work.
对筒状物及角部弧形缝制有良好效果
- Suitable for sewing such products as caps, cushions, boots, shoes, bags, luggage, handbags, travelware accessories, etc. (except CW-1)
适用于缝制各种帽子, 坐垫, 鞋类, 靴子, 手提袋, 皮包, 衣袋袖口, 旅行箱包等产品



Features / 特征

- Vertical axis hook.
采用水平旋梭
- Safety clutch prevents the hook from being damaged.
旋梭防损安全装置
- No Feeding mechanism allows sewing work in any direction as required for darning and mending. (-1 only)
不带送料机构可按任何方向移动缝制, 特别适用于修理等缝制作业 (限于-1机种)
- Reverse stitching (except -1).
配置倒缝装置 (-1机种以)
- Compound feed and alternating pressers mechanism assures even feeding of materials. (-8B-2, -8BV)
综合送料机构可减少缝制中的偏差和移位 (-8B-2, -8BV机种)
- No Reverse stitch version available.
提供无倒缝装置的同类机种
- Semi-automatic lubrication system and large hook machines are available. (LCW series)
提供大梭床, 半自动加油等同类机种

Specifications (CW-□) / 规格

Variety	机型	1	7B	8B-2	8BV
Number of needle	针数	Single needle 单针			
Max. speed	最高缝速	2800(s.p.m.)	2500(s.p.m.)		
Max.stitch length	最大针距	—	13/64" (5 mm)		11/64" (4.5 mm)
Clearance under presser foot 压脚提升量	by pedal 踏板	25/64" (10 mm)	25/64" (10 mm)	35/64" (14 mm)	33/64" (13 mm)
	by hand 手提	—	21/64" (8.5 mm)	21/64" (8.5 mm)	9/32" (7 mm)
Needle bar stroke	针杆行程	1-5/16" (33.2 mm)			
Needle(standard)	机针 (标准)	FOx3 (#18) FOx3 (#110)	DPx17 (#22) , 135x17 (#140)		DPx17 (#18) 135x17 (#110)
Thread	缝线	#8 (standard) 标准			
Hook	旋梭	Vertical axis hook 水平式			
Amount of lift of alternating presser foot 压脚交替上下量		—		7/64"-7/32" standard 1/8" (2.7 - 5.5 mm) (standard 3.2 mm)	
Thread take up lever	天秤	Slide type 滑杆式			
Lubrication	供油方式	Hand type 手动供油			
Cylinder size	筒部尺寸	2-9/16"(65 mm) dia.			
Working space	作业空间	10-5/32"x 4-21/64" (258 x 110 mm)			
Motor	电机	Clutch motor 离合器电机			
Net weight(Head only)	机头重量	32Kg			

NOTE

- (1) Speed depends on threads, materials and type of operation
- (2) Specifications subject to change without notice

Optional parts and attachments at extra charge / 配件及另售零件

Variety 机型	Parts name & No.				
	Finger guard 护指环	Belt cover 皮带罩壳	Binder 包边器	Feed dog ("L" shape) 送布牙	Vibrating p.f. ("L" shape) 内压脚
1	—	13425C	—	—	—
7B	10955-01	13425C	—	—	—
8B-2	10937	13425C	—	—	—
8BV	10937	13425C	2A type (2-fold) 3A type (3-fold)	13244	13250



SEIKO SEWING MACHINE CO., LTD.

1-11-3, Imado, Taito-ku, Tokyo 111-8534, Japan

Phone : +81-3-3872-6173 (Overseas dept.)

Fax : +81-3-3873-6596

E-mail : chimkt@seiko-sewing.co.jp

精工缝纫机株式会社

日本国東京都台東区今戸1-11-3

电 话 : +81-3-3872-6173 (海外部)

传 真 : +81-3-3873-6596

电子邮件 : chimkt@seiko-sewing.co.jp

Printed in Japan 2003.10

<http://www.seiko-sewing.co.jp/>