





TRADE MARK

SEIKO




STW-8B



**SINGLE NEEDLE, VERTICAL AXIS HOOK, COMPOUND FEED AND
ALTERNATING PRESSERS, REVERSE STITCH, LOCKSTICH MACHINES**

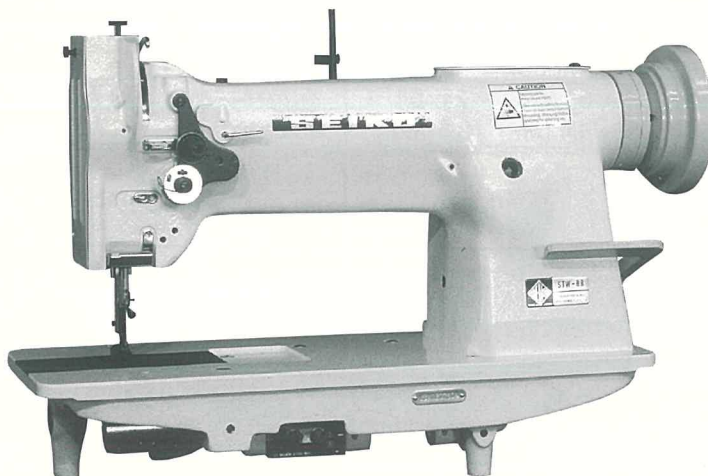

STW-8B

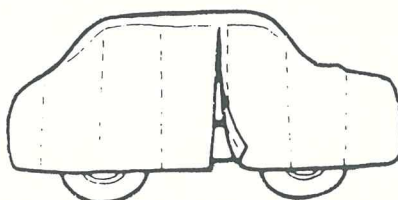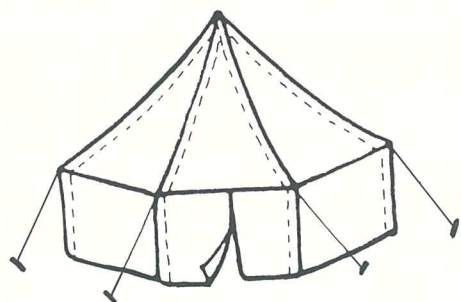

APPLICATIONS:

For sewing medium to heavy weight fabrics, leather, vinyl, synthetics and laminated and coated materials

Suitable for sewing such as auto, boat and furniture upholstery, tarpaulins, covers, awnings, tents, umbrellas, handbags, luggage, travelware accessories, sports and camping equipment, wearing apparel, outdoor clothing, footwear, orthopedic appliances, etc.

FEATURES

- Vertical axis hook
- Safety clutch prevents the hook from being damaged
- All sizes of cording feet available
- Reverse stitching
- Compound feed and alternating presser foot mechanism assures even feeding of material

SPECIFICATIONS



	Max. speed (s.p.m.)	Max. stitch length	Clearance under presser foot		Needle bar stroke	Needle (standard)
			(by knee)	(by hand)		
STW-8B	3,000	7/32" (5.5 mm)	35/64" (14 mm)	21/64" (8.5 mm)	1-5/16" (33.2 mm)	DPx17 (#22) 135x17 (#140)
	Amount of lift of alternating presser foot		Bed size		Working space	
STW-8B	7/64"-7/32" standard 1/8" (2.7 - 5.5 mm) standard (3.2 mm)		18-25/32" x 7" (477 x 177 mm)		10-5/32" x 4-21/64" (258 x 110 mm)	

NOTE

- (1) Speed depends on threads, materials and type of operation
- (2) Specifications subject to change without notice

SPECIAL PRESSER FOOT (FOR CORDING WORK)

SPECIAL PRESSER FOOT (FOR CONDYING WORK)

Size A (mm)	4.5					6.2					
Size B (mm)	5.2					6.6					
Size R (inch)	1/8"	5/32"	3/16"	1/4"	5/16"	1/8"	5/32"	3/16"	-		
Size R (mm)	3.2	4	4.8	6.4	7.9	3.2	4	4.8	5		
Vibrating P.F. No.	11890	11891	11892	11895	11896	11910	11911	11912	11893		
Lifting P.F. No.	11900	11901	11902	11905	11906	11920	11921	11922	11903		
Size A (mm)	6.2					Vibrating presser foot				Lifting presser foot	
Size B (mm)	6.6										
Size R (inch)	-	1/4"	9/32"	5/16"	3/8"						
Size R (mm)	6	6.4	7.1	7.9	9.5						
Vibrating P.F. No.	11894	11913	11914	11915	11916						
Lifting P.F. No.	11904	11923	11924	11925	11926						

AVAILABLE MODEL VERSION

Model STW-26	Two needle, drop feed
Model STW-8BM	Single needle, vertical edge trimming
Model STW-8M	Single needle, vertical edge trimming, no reverse stitch
Model STW-8VP	Single needle, synchronized binder, piping, no reverse stitch
Model STW-8VPM	Single needle, synchronized binder, piping, vertical edge trimming, no reverse stitch



SEIKO
SEWING MACHINE CO., LTD.

<http://www.tctv.ne.jp/seik0001/>

SEIKO SEWING MACHINE CO., LTD.

11-3, Imado 1-chome, Taito-ku, Tokyo 111-8534, Japan

TEL: +81-3-3872-6173 (Overseas group)

FAX: +81-3-3873-6596

E-Mail: seik0001@tctv.ne.jp

URL: <http://www.tctv.ne.jp/seik0001/>