

S007K/KD SERIES FEATURES



自動切線系列新設計上夾線裝置，出刀迅速精準，夾線穩定

Auto trimmer with newly designed upper thread holder, trims precisely and stably.



三合一壓骨，倒骨，折下擺，更換作業組裝方便，多樣化功能，提供生產廠商高效率低成本

3-in-1 model, including bottom hemming/seam covering/overtured seam covering, provides high efficiency at less cost.



超小筒徑圓周只有180毫米，車縫小孔徑圓筒針織物，更加方便就手

The small cylinder designed with 180 mm, the extremely small circumference makes sewing operation smoother.



外置式底線分線盤，置於機體前方，調整容易，拆裝方便，可輕易清除絞線

Front exposed looper thread take-up mechanism makes cleaning and adjusting more convenient. After fine tuning the looper thread eyelet holder, sewing can be more accurate.




調整式進布誘導器，活動式壓腳，車縫適用性更廣

Adjustable folder, flexible presser foot, able to accomodate wider range of sewing items.



超短筒的設計，筒邊至中針距離只有31毫米，採密封式之側蓋設計，操作方便順暢

Extremely small tubule design, the distance from cylinder edge to middle needle is only 31 mm. Sealed side cover makes operation more convenient.



密縫裝置

藉由縮短送具行程，在車縫起始或結束進行密縫的功能，確保縫線不易脫落，提高車縫品質，基本車為腳踏板控制，電動和氣動控制為選配

Condense Stitching Device

By reducing the strokes of feed dog, at the beginning and the end of sewing, condense stitching reinforces the stitches. This enhances the sewing sturdiness and quality. Basic model is controlled by pedal. Electric and pneumatic controls are optional.



自動切線系列新設計氣/電動上下切刀組，出刀迅速穩定精準，切線俐落，輕順低噪音調整容易

Auto trimmer with newly designed pneumatic / electric trimming system, trims precisely and stably, reduce sound and easy to adjust.



全新設計之內藏式定位器，定位精準，徹底解決外置式定位器，不易安裝，調整及定位不穩之情形

Newly designed built-in synchronizer, makes position precisely and stably, easy to adjust.




圓形粗細針縫目調整鈕的設計，隨心所欲精確調整縫目長短

Circular stitch length adjustment button, easily to adjust stitch length.



小型投射LED照明，穿線或調整機針作業方便（選配）

LED light, convenient for threading or adjusting the needle (Optional).

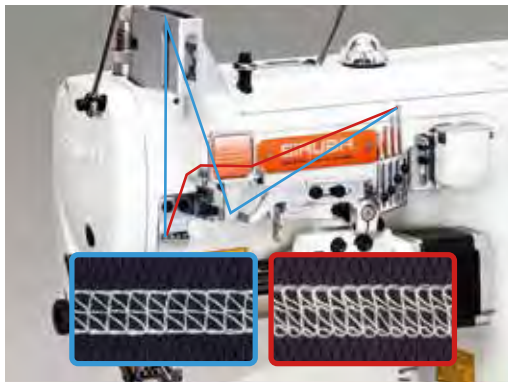

雙天秤挑線控線組

全新雙天秤挑線控線組的設計，縫製厚、薄布料皆適用，車縫適用範圍更廣，適用性更高

Dual Thread Take-up Mechanism


The brand new design of dual thread take-up lever thread tension combination is ideal for both heavy and light fabric. Sewing applicable range is wider and the applicability is higher.

- 中厚布料 (Medium heavy fabric)
- 薄布料 (Light fabric)

								
S007K-W122-240/PCH-3M	2	4	4.0	1.4 ~ 4.2	0.8 ~ 1.4	5/7	UYX128GAS#10	4000
S007K-W122-248/PCH-3M	2	4	4.8	1.4 ~ 4.2	0.8 ~ 1.4	5/7	UYX128GAS#10	4000
S007K-W122-356/PCH-3M	3	5	5.6	1.4 ~ 4.2	0.8 ~ 1.4	5/7	UYX128GAS#10	4000
S007K-W122-364/PCH-3M	3	5	6.4	1.4 ~ 4.2	0.8 ~ 1.4	5/7	UYX128GAS#10	4000
S007KD-W122-240/PCH-3M/DS□	2	4	4.0	1.4 ~ 4.2	0.8 ~ 1.4	5/7	UYX128GAS#10	4000
S007KD-W122-248/PCH-3M/DS□	2	4	4.8	1.4 ~ 4.2	0.8 ~ 1.4	5/7	UYX128GAS#10	4000
S007KD-W122-356/PCH-3M/DS□	3	5	5.6	1.4 ~ 4.2	0.8 ~ 1.4	5/7	UYX128GAS#10	4000
S007KD-W122-364/PCH-3M/DS□	3	5	6.4	1.4 ~ 4.2	0.8 ~ 1.4	5/7	UYX128GAS#10	4000



S007K-W122-356/PCH-3M/UTT



[三合一] 一般平縫 / 下擺車縫 / 拷克倒骨蓋

本機型為雙面飾中厚布用環縫橫式小筒車之基本機型，配附拷克倒骨進行多種功能車縫

例如：內衣褲、運動衫接縫、下擺車縫及倒骨縫

註：可依需求選擇出廠時之校縫

Eg：S007K-W122-356/PCH-3M 以下擺車縫校縫

S007K-W122-356/PCC-3M 以三線拷克倒骨中厚布校縫

S007K-W122-356/PCD-3M 以三線拷克倒骨薄布校縫

[3 IN 1]

GENERAL SEAMING / BOTTOM HEMMING / COVERING (Fold-down Type)

This basic model of small cylinder machine. 3-in-1 model, includes bottom hemming/seam covering overturned seam covering.

Remark：Initial setting can be set according to request：

Eg：S007K-W122-356/PCH-3M Hemming

S007K-W122-356/PCC-3M fold-down seam covering
for medium fabric

S007K-W122-356/PCD-3M fold-down seam covering
for light fabric

選購配件 OPTIONAL DEVICE

UTT, UTU, UTX, UTY, CMR, SAR/UTT, SAR/UTU



S2



	2	4	4.0	1.4 ~ 4.2	0.8 ~ 1.4	5/7	UYX128GAS#10	4000
S007K-W322-240/PCE	2	4	4.8	1.4 ~ 4.2	0.8 ~ 1.4	5/7	UYX128GAS#10	4000
S007K-W322-248/PCE	3	5	5.6	1.4 ~ 4.2	0.8 ~ 1.4	5/7	UYX128GAS#10	4000
S007K-W322-356/PCE	3	5	6.4	1.4 ~ 4.2	0.8 ~ 1.4	5/7	UYX128GAS#10	4000
S007KD-W322-240/PCE/DS□	2	4	4.0	1.4 ~ 4.2	0.8 ~ 1.4	5/7	UYX128GAS#10	4000
S007KD-W322-248/PCE/DS□	2	4	4.8	1.4 ~ 4.2	0.8 ~ 1.4	5/7	UYX128GAS#10	4000
S007KD-W322-356/PCE/DS□	3	5	5.6	1.4 ~ 4.2	0.8 ~ 1.4	5/7	UYX128GAS#10	4000
S007KD-W322-364/PCE/DS□	3	5	6.4	1.4 ~ 4.2	0.8 ~ 1.4	5/7	UYX128GAS#10	4000



S007K-W322-356/PCE/UTT



拷克立骨蓋縫

適宜中厚布料，經三線拷克車縫後再包縫，用於運動服、汗衫等領口、下擺、袖管等之拷邊車縫後加以包縫，可增加服飾之美觀及車縫之牢固，利用導布片及壓具上之壓刀導縫，可避免車縫時彎曲不直

OVERLOCK-SEAM COVERING (Flatting Type)

Bulging seam covering for medium fabric after 3 thread plain seaming, suitable for neck openings, sleeve, cuff or bottom of sportswears, T-shirts, etc... With fabric guide and special presser foot, making sewing easy and more efficient.

選購配件 OPTIONAL DEVICE

UTT, UTU, UTX, UTY, SAR/UTT, SAR/UTU, CMR

S007KD-W121-□□□/FFT/DS□	2	4	4.0/ 4.8	1.4 ~ 4.2	0.8 ~ 1.4	1~5.5	5	UYX128GAS#10	4000
	3	5	5.6/ 6.4	1.4 ~ 4.2	0.8 ~ 1.4	1~5.5	5	UYX128GAS#10	4000
S007KD-W122-□□□/FFT/DS□	2	4	4.0/ 4.8	1.4 ~ 4.2	0.8 ~ 1.4	1~5.5	5	UYX128GAS#10	4000
	3	5	5.6/ 6.4	1.4 ~ 4.2	0.8 ~ 1.4	1~5.5	5	UYX128GAS#10	4000
S007KD-W131-□□□/FFT/DS□	2	4	4.0/ 4.8	1.4 ~ 4.2	0.8 ~ 1.4	1~5.5	5	UYX128GAS#10	4000
	3	5	5.6/ 6.4	1.4 ~ 4.2	0.8 ~ 1.4	1~5.5	5	UYX128GAS#10	4000
S007KD-W132-□□□/FFT/DS□	2	4	4.0/ 4.8	1.4 ~ 4.2	0.8 ~ 1.4	1~5.5	5	UYX128GAS#10	4000
	3	5	5.6/ 6.4	1.4 ~ 4.2	0.8 ~ 1.4	1~5.5	5	UYX128GAS#10	4000



FFT 上送布功能

專利優化前後移動送具之結構設計，有效送布行程大，車縫送布更穩定


FFT TOP FEEDING FUNCTION

Back and forth moving feed dog is designed by patent and improved mechanism. The effective feeding stroke is bigger, and fabric feeding is more stable.


選購配件 OPTIONAL DEVICE

UTT, UTX


X Brand



Y Brand



SiRUBA



S4



S007KD-U173-100/SAR/RF/UTT/DS□ 1 2 - 1.4 ~ 4.2 0.8 ~ 1.4 5/7 UYX128GAS#18 4000



S007KD-U173-100/SAR/RF/UTT/DS□

單針鏈縫牛仔褲轆腳機

針對彈性牛仔布料的車縫所開發的規格，配備專用的氣動式轆腳喇叭，因為具有差動送布功能，可以車縫出美觀平整的效果

標配：氣動式自動切線

氣動抬壓腳

直驅伺服馬達

結束密縫

SINGLE NEEDLE CHAINSTITCH JEANS BOTTOM HEMMING MACHINE

Special gauge for elastic denim fabric, and equipped with pneumatic hemming folder. Because of the function of differential feeding, the sewing quality is nice and perfectly flat.

Standard Equipment: Pneumatic thread trimmer
Pneumatic presser foot lifter
Direct-drive servo motor
Condensed stitching device



S5



S007KD-W815A-356/SRL/UTT/DSK□ 3 5 5.6 1.4 ~ 4.2 0.8 ~ 1.4 5/7 UYX128GAS#10 4000



S007KD-W815A-356/SRL/UTT/DSKH1

左切刀修布下擺車縫

左切刀修布邊/下擺車縫工程適用於小筒型繃縫車

BOTTOM HEMMING WITH LEFT SIDE FABRIC TRIMMER

Left edge trimmer designed for small cylinder machine with auto thread trimmer function.

