

DT828L

銀箭牌

Computerized Double Needle Lockstitch Sewing Machine With Double Stepping Motor

雙步進雙針電腦平縫車



- 上軸採用通軸設計，整體力矩輕，機器運轉平穩，送料流暢。
- 本機採用750W大功率伺服電機直接驅動，噪音低、震動小，安裝方便，啟動停車反應迅速，機針貫穿力強。
- 雙步進驅動技術，實現縫、加固、剪線和抬壓腳無聲。
- 密封式油盒設計，清潔無污染。
- 電子膝控裝置，抬壓腳輕盈省力，降低勞動強度。
- LED照明燈亮度三檔可調。
- 多鍵位操作面板，操作內容直觀，簡單方便。
- 一體式背掛式電控，安裝方便。
- The upper shaft adopts the through-all design; the overall torque is light; the machine runs smoothly; and the feeding is smooth.
- 750W high-power servo motor: larger needle penetration force, lower noisy, lower vibration, easier to install and shorter responding time.
- Stepping motor with bidirectional driven technique: powerful, stable as well as quiet when end back-tacking, reinforced stitching, trimming, and presser foot lifting.
- The sealed lubricate design: avoid fabrics from grease effectively.
- Electronic knee control pad makes the foot lifter light and easy to operate.
- 3-level LED light.
- Multi-functional panel: intuitive and user-friendly.
- Integrated back-mounted control box; easy to install.


 SIRUBA

特點

FEATURES

<p>角縫車縫 Split needle bar sewing</p>	<p>一般車縫 General sewing</p>		<p>高品質的加固縫線跡： 採用步進馬達控制的送料機構，精準控制送料行程，任何針距下都可以實現線跡重合的加固縫。</p>	<p>電子膝控： 不改變工人的操作習慣實現輕鬆抬壓腳。</p>	
<p>多功能按鍵設置： 可以輕鬆實現轉角、倒縫、密縫、補針等縫紉。</p>	<p>The multifunctional buttons: easy to achieve angle change, reverse stitch, seam stitch and stitch compensation.</p>	<p>High-quality reinforcement stitches: Step motor can accurately control the feeding, making reinforcement available for any stitch length.</p>	<p>Electronic knee pad: Without worker changing operating habits, presser foot can be easily lifted.</p>		

- 1 步進馬達雙向驅動技術 (專利技術)：**
一個馬達完成切線和抬壓腳動作。
可靠的切線機構：
切線機構採用步進馬達驅動，結構簡單、切線穩定、方便維護。
Stepping motor bidirectional driven technology (patent) :
One step motor control trimming and pressing foot lifter work.
The unique thread trimmer device:
Adopt step motor to drive, stable, light noise and convenience on maintenance.
- 2 直刀剪線結構：**
直刀剪線機構，剪線穩定。
Straight knife system :
Straight knife thread trimming mechanism, stable thread trimming.
- 3 密封油盤設計：**
縫料清潔無污染。
The sealed lubricate design :
Effectively avoid the material dirty from oil.
- 4 多鍵位操作面板：**
操作盒按鍵內容直接，操作簡便迅速。
Multi-key operation panel :
The operation box has direct key content, and the operation is simple and rapid.

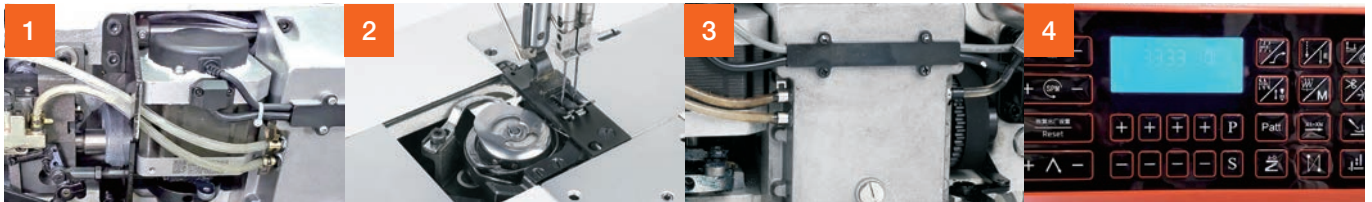

規格

SPECIFICATIONS

DT828L	mm	Needle No. DP X 5	布料厚度 Fabric Weight			mm	mm	S.P.M. (Max)	mm	KG	
			L	M	H						手動 Hand
42	3.2 4.8 6.4	#11 - #16				7	8-12 (可調 Adjustable)	3000	L680 W290 H640	55 / 62	
45											M : 0~4 H : 0~5
72		#14 - #22									M : 0~7 H : 0~7
75											

功能 Function	規格Sub-Class	針送 Needle Feed	標準旋梭 Standard Hook	大旋梭 Big Hook	倒縫 Reverse Feeding	角縫 Split Needle Bar
	42	V	V	-	V	-
	45	V	V	-	V	V
	72	V	-	V	V	-
	75	V	-	V	V	V



由於對產品的改良及更新，本產品型錄中之產品規格及外觀的修改恕不事先通知！
The specification and/or appearances of the equipment described in this catalogue are subject to change without previous notice because of modification.

