




SEIKO

LCW Series

High Speed, Cylinder Bed, Single Needle,
Automatic Lubrication System,
Horizontal Rotary Hook,
Lockstitch Machine

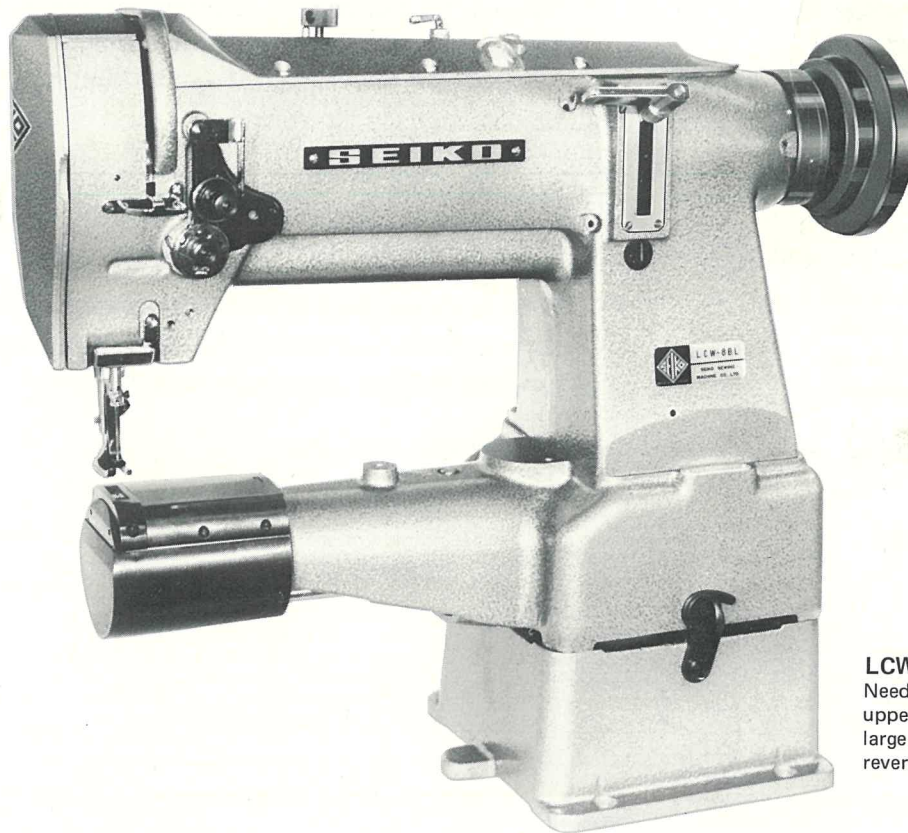


LCW-8BL
Needle,
upper & lower feed,
large hook,
reverse feed.

WITH


Large hook, reverse feed : LCW-1L/LCW-6BL/LCW-7BL/LCW-8BL
Standard hook, reverse feed : LCW-6B/LCW-7B/LCW-8B

In addition to the above LCW series, the models equipped with
synchronized binder (LCW-8V, LCW-8BV, LCW-8LV, LCW-8BLV), and
upper feed with spring return presser foot mechanism (LCW-6F) are available.




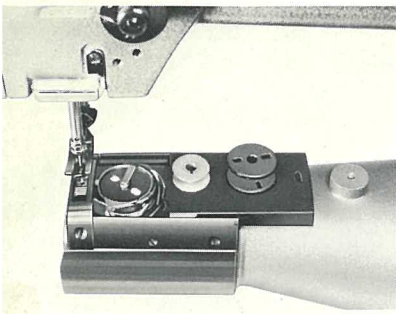

Winding volume of LCW large bobbin is more 2 times than conventional DB types. Thus, you can save a time for exchange lower thread.

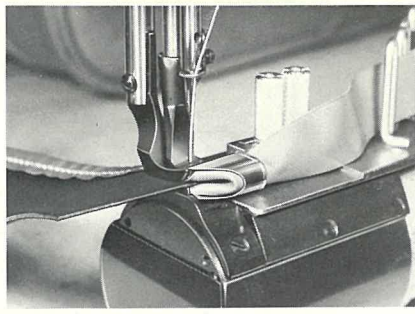

● Tape binding of 2 folds, 3 folds, and 4 folds can be done by fitting of various kinds of binders.

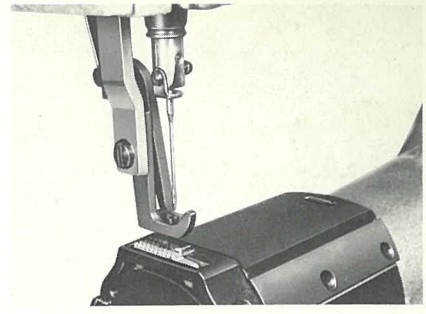

● LCW-6F Upper feed with spring return presser foot, lower feed. Suitable for sewing of medium - heavy weight materials, such as leather, man-made leather, vinyl. Especially, suitable for sewing of tubular products, such as leather gloves, shoes, bags, hand-bags, etc.

- 2W-1L : No feed.
- 2W-6 : Lower feed.
- 2W-6L : — do —, large hook.
- 2W-6B : — do —, reverse feed.
- 2W-6BL : — do —, large hook.
- 2W-6F : Upper feed with spring return presser foot, lower feed.
- 2W-7 : Needle & lower feed.
- 2W-7B : — do —, reverse feed.
- 2W-7L : — do —, large hook.
- 2W-7BL : — do —, large hook.
- 2W-8 : Needle, upper & lower feed.
- 2W-8B : — do —, reverse feed.
- 2W-8L : — do —, large hook.
- 2W-8BL : — do —, large hook.
- 2W-8V : Needle, upper & lower feed, with synchronized binder.
- 2W-8LV : — do —, large hook.
- 2W-8BV : — do —, reverse feed.
- 2W-8BLV : — do —, large hook.

● Main Use

Suitable for sewing of suit-sleeve and tubular products of various kinds of heavy weight materials. Synchronized binder suits for tape binding of hats, shoes, sandals, slippers, knitting gloves, suit, etc.

● Main Features

Automatic lubrication system maintains durable and stabilized sewing. Wide working space makes possible easy sewing. Safety device to prevent hook damage makes operators concentrate on their operations, without care.

Use Suitable for sewing of leather, shoes, luggages, bags, etc.

Specifications

Model	Sewing Speed (s.p.m.)	Presser Lift (mm)	Needle Bar Stroke (mm)	Stitch Length (mm)	Needle	Bed Size (mm)	Working Space (mm)
1L	2,200	10	33.2	—	FO x 3 Standard #18 Sy 3303, 1671 28	77φ x 269	258 x 110
6	3,000	8.5 (13)	"	5	DP x 17 Standard #18 Sy 3355, 2167	65φ x 269	"
6B	2,800	"	"	"	"	"	"
6L	"	"	"	6.5	"	77φ x 269	"
6BL	2,500	"	"	"	"	"	"
6F	2,800	7.5 (13)	"	5	Standard #22 Standard #18	65φ x 269	"
7	3,000	8.5 (13)	"	4.5	" Standard #22	"	"
7B	2,800	"	"	5	"	"	"
7L	2,500	10 (13)	"	6.5	"	77φ x 269	"
7BL	2,300	"	"	"	"	"	"
8	3,000	8.5 (13)	"	4.5	"	65φ x 269	"
8B	2,800	"	"	5	"	"	"
8L	2,300	" (16)	"	6.5	"	77φ x 269	"
8BL	"	"	"	"	"	"	"
8V	2,800	" (13)	"	5	" Standard #18	65φ x 269	"
8BV	"	"	"	"	"	"	"
8LV	2,000	"	"	6	"	77φ x 269	"
8BLV	"	"	"	"	"	"	"

Presser lift shown in parenthesis are by knee lifter.

LCW-8, 8B are available to 6 mm amount of up/down movement of inside & outside feet respectively.

All rights of change reserved. ● Sewing conditions may differ from the above specifications according to the materials being sewn.

Please consult us about your sewing problems.



SEIKO SEWING MACHINE CO., LTD.